

REPORT DOCUMENTATION PAGE					<i>Form Approved</i> OMB No. 0704-0188	
The public reporting burden for this collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing the burden, to Department of Defense, Washington Headquarters Services, Directorate for Information Operations and Reports (0704-0188), 1215 Jefferson Davis Highway, Suite 1204, Arlington, VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to any penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number. PLEASE DO NOT RETURN YOUR FORM TO THE ABOVE ADDRESS.						
1. REPORT DATE (DD-MM-YYYY) 13-06-2014		2. REPORT TYPE Final			3. DATES COVERED (From - To) 23 May 2012 – 23 May 2014	
4. TITLE AND SUBTITLE Thermal transport and measurement of specific heat in artificially sculpted nanostructures				5a. CONTRACT NUMBER FA23861214045		
				5b. GRANT NUMBER		
				5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Dr. Mandar Madhokar Deshmukh				5d. PROJECT NUMBER		
				5e. TASK NUMBER		
				5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Tata Institute of Fundamental Research DCMP and MS, Homi Bhabha Road Mumbai 400005 India					8. PERFORMING ORGANIZATION REPORT NUMBER N/A	
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AOARD UNIT 45002 APO AP 96338-5002					10. SPONSOR/MONITOR'S ACRONYM(S) AOARD	
					11. SPONSOR/MONITOR'S REPORT NUMBER(S) AOARD-124045	
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution is unlimited.						
13. SUPPLEMENTARY NOTES						
14. ABSTRACT Our work in the last two years focused on the idea of using change in thermal strain to extract information about thermal conductivity. One experiment explores using a nanomechanical resonator made using a nanowire and measures the thermal conductivity by tracking the frequency change that results from the temperature profile inside the nanowire – this is a steady state version of the measurement. We have also explored how the plasmon mode can modify the elastic properties of a nanoscale system across a phase transition; this could imply a large change in thermal properties. In the last one year we have extended our technique to perform dynamical measurements. We see that modulation of current through the nanowire we can see a second harmonic sideband modulation in a nanomechanical system.						
15. SUBJECT TERMS thermal transport , nano materials, nano structures						
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT UU	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON Tammy Low, Lt Col, USAF, Ph.D.	
a. REPORT U	b. ABSTRACT U	c. THIS PAGE U			19b. TELEPHONE NUMBER (Include area code) +81-3-5410-4409	

Report Documentation Page			Form Approved OMB No. 0704-0188		
Public reporting burden for the collection of information is estimated to average 1 hour per response, including the time for reviewing instructions, searching existing data sources, gathering and maintaining the data needed, and completing and reviewing the collection of information. Send comments regarding this burden estimate or any other aspect of this collection of information, including suggestions for reducing this burden, to Washington Headquarters Services, Directorate for Information Operations and Reports, 1215 Jefferson Davis Highway, Suite 1204, Arlington VA 22202-4302. Respondents should be aware that notwithstanding any other provision of law, no person shall be subject to a penalty for failing to comply with a collection of information if it does not display a currently valid OMB control number.					
1. REPORT DATE 19 JUN 2014		2. REPORT TYPE Final		3. DATES COVERED 23-05-2012 to 23-05-2014	
4. TITLE AND SUBTITLE Thermal transport and measurement of specific heat in artificially sculpted nanostructures			5a. CONTRACT NUMBER FA23861214045		
			5b. GRANT NUMBER		
			5c. PROGRAM ELEMENT NUMBER		
6. AUTHOR(S) Mandar Madhokar Deshmukh			5d. PROJECT NUMBER		
			5e. TASK NUMBER		
			5f. WORK UNIT NUMBER		
7. PERFORMING ORGANIZATION NAME(S) AND ADDRESS(ES) Tata Institute of Fundamental Research,DCMP and MS, Homi Bhabha Road,Mumbai 400005,India,NA,NA			8. PERFORMING ORGANIZATION REPORT NUMBER N/A		
9. SPONSORING/MONITORING AGENCY NAME(S) AND ADDRESS(ES) AOARD, UNIT 45002, APO, AP, 96338-5002			10. SPONSOR/MONITOR'S ACRONYM(S) AOARD		
			11. SPONSOR/MONITOR'S REPORT NUMBER(S)		
12. DISTRIBUTION/AVAILABILITY STATEMENT Approved for public release; distribution unlimited					
13. SUPPLEMENTARY NOTES					
14. ABSTRACT Our work in the last two years focused on the idea of using change in thermal strain to extract information about thermal conductivity. One experiment explores using a nanomechanical resonator made using a nanowire and measures the thermal conductivity by tracking the frequency change that results from the temperature profile inside the nanowire ? this is a steady state version of the measurement. We have also explored how the plasmon mode can modify the elastic properties of a nanoscale system across a phase transition; this could imply a large change in thermal properties. In the last one year we have extended our technique to perform dynamical measurements. We see that modulation of current through the nanowire we can see a second harmonic sideband modulation in a nanomechanical system.					
15. SUBJECT TERMS thermal transport , nano materials, nano structures					
16. SECURITY CLASSIFICATION OF:			17. LIMITATION OF ABSTRACT Same as Report (SAR)	18. NUMBER OF PAGES 4	19a. NAME OF RESPONSIBLE PERSON
a. REPORT unclassified	b. ABSTRACT unclassified	c. THIS PAGE unclassified			

"Research Title Thermal transport and measurement of specific heat in artificially sculpted nanostructures"

Date

Name of Principal Investigators (PI and Co-PIs):

- e-mail address : deshmkh@tifr.res.in
- Institution : Tata Institute of Fundamental Research (TIFR)
- Mailing Address : DCMP and MS, TIFR, Homi Bhabha Road Mumbai 400005
- Phone : +91-22-2278-2829
- Fax : +91-22-2280-4610 (ATTN: Mandar M. Deshmukh)

Period of Performance: 05/23/2012 – 05/23/2014

Abstract: Our work in the last two years focused on the idea of using change in thermal strain to extract information about thermal conductivity. One experiment explores using a nanomechanical resonator made using a nanowire and measures the thermal conductivity by tracking the frequency change that results from the temperature profile inside the nanowire – this is a steady state version of the measurement. We have also explored how the plasmon mode can modify the elastic properties of a nanoscale system across a phase transition; this could imply a large change in thermal properties. In the last one year we have extended our technique to perform dynamical measurements. We see that modulation of current through the nanowire we can see a second harmonic sideband modulation in a nanomechanical system.

Introduction: Our proposal's goal was to be able to measure thermal conductivity and specific heat in nanostructures. Measurement of thermal conductivity using techniques like 3ω are powerful means to thermal properties of bulk material. However, they present serious challenges because of electrical nonlinearities than give rise to various higher harmonics that can make the accurate measurement of the thermal conductivity challenging. In order to overcome this challenge we developed a new technique to measure the thermal conductivity of nanostructure by measuring the thermal strain that reflects accumulated thermal strain inside a NEMS device like a suspended nanowire. This technique is very general and be applied across systems. As of now we have measured the thermal conductivity by slowly modulating the heating signal. By modulating the heating current to frequencies ~ 10 -100 KHz we expect to measure the specific heat of the nanostructures. (details in publication Nano Lett., 12,6432 (2012).) In order to achieve this we had to develop a new technique to measure the resonance of NEMS devices using a wide bandwidth. This required the new fabrication technique to make NEMS devices on insulators, like sapphire. Following this in the last one year we have developed the modulation to see sidebands in the original resonant responses

Because of the development of the technique to study thermal conductivity we were able to extend the work to measure the elastic property of nanoscale NEMS device using a charge density wave system so that elastic property is modified due to the coupling of the elastic mode with the plasmons associated with charge density wave system. This suggests that the coupling with plasmonic mode could modify the thermal properties of the nanostructures (details in publication Phys. Rev. Lett. 110, 166403 (2013))

Experiment: Both the experiments that we have done use the fabrication of suspended devices (figure 1)

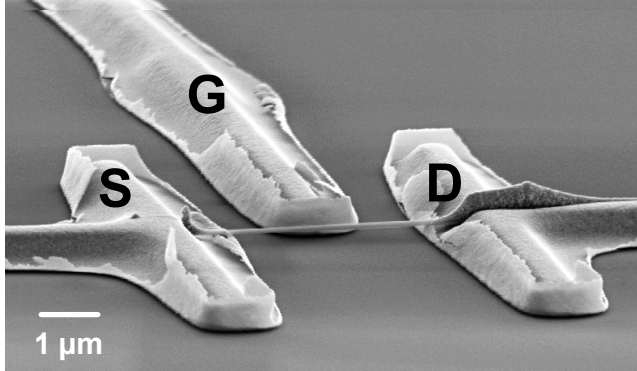


Figure 1 Scanning electron microscope image of a suspended nanowire resonator. The resonant frequency is tracked using a network analyzer Nano Lett., 12,6432 (2012).)

where we suspend the device to thermally isolate the material and this also enables the measurement of the thermal conductivity and elastic properties by measuring and tracking as function of various parameters the evolution of the resonant frequency of the suspended device. (details regarding the fabrication and measurement scheme provided in the publications 1 and 2).


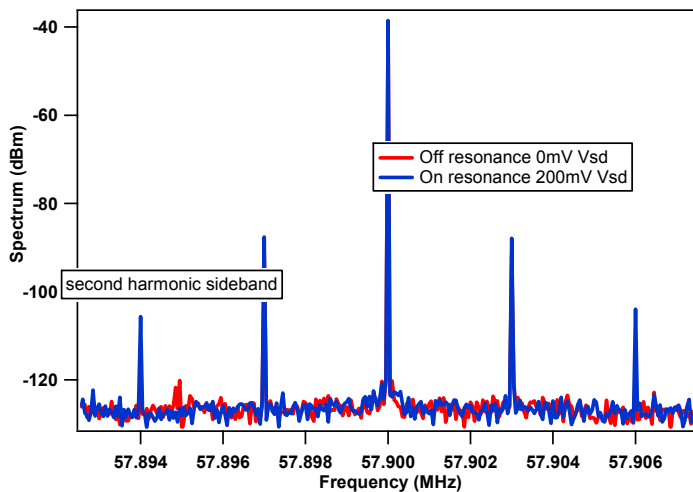


Figure 2 Frequency spectrum around the mechanical drive tone at 57.9 MHz. The sideband corresponding to the second harmonic of modulation to the left and right shows up only when the nanowire is at resonance.

We are now using dynamical effect to probe the time scale at which the heat is removed from a nanoscale system. The rate of heat removal from a suspended wire depends on the thermal conductivity, specific heat and geometry of the nanostructure. If we consider the modulation of heat in a system at a rate much slower than the intrinsic rate of removal of heat then after every cycle there

is no net heat accumulation in the nanostructure. As we change the current through the nanowire at frequency f the heat is modulated into the system at frequency $2f$. Because of the heating the nanowire expands and contracts at frequency $2f$ and this results in development of sidebands at around the f_m – namely the mechanical resonant frequency. This clearly seen in the figure 3.

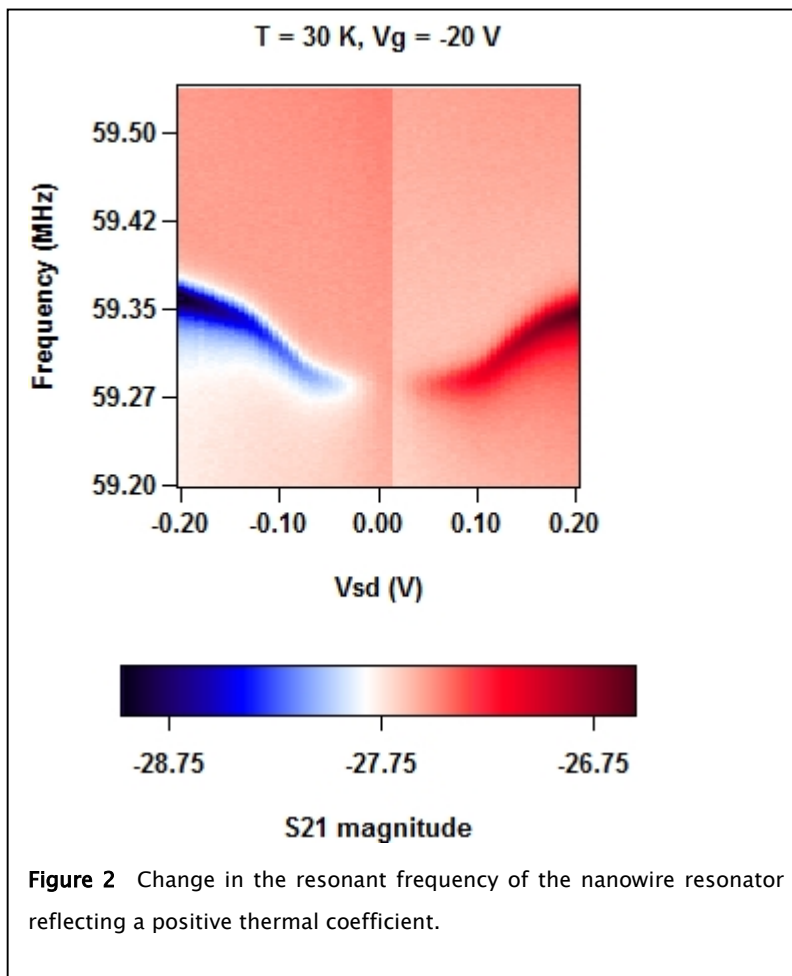

We are in the process of using this dynamical response to get a direct measurement of the diffusivity of the system by tracking the amplitude of the second harmonic sideband. We expect a publication from this dynamical measurement of the heat transport through a

nanoelectromechanical system.

Results and Discussion:

- By tracking the resonant frequency of suspended devices we are able to determine thermal strains $\sim 0.01\%$ accurately and this allow determination of thermal conductivity. A new fabrication technique and measurement technique was developed to enable this.
- Using the new technique it is possible to show the plasmons affect the elastic properties of nanoscale CDW system. This implies that across phase transitions the elastic properties are modified dramatically; this may be reflected in the thermal properties as well.
- We are finishing experiments currently where we are changing the frequency of modulation to see the effect of heating.

List of Publications and Significant Collaborations that resulted from your AOARD supported project:

- a) papers published in peer-reviewed journals
 - Wide Bandwidth Nanowire Electromechanics on Insulating Substrates at Room Temperature

T. S. Abhilash, John P. Mathew, Shamashis Sengupta, M. R. Gokhale, Arnab Bhattacharya, and Mandar M. Deshmukh
Nano Lett., 12,6432 (2012).

- Plasmon mode modifies the elastic response of a nanoscale charge density wave system
Shamashis Sengupta, Niveditha Samudrala, Vibhor Singh, Arumugam Thamizhavel, Peter B. Littlewood, Vikram Tripathi, and Mandar M. Deshmukh
Phys. Rev. Lett. 110, 166403 (2013).
- Dynamically measuring the thermal diffusivity in nanostructures. John P. Mathew et al. (in preparation).

Attachments: Publications 1 and 2